
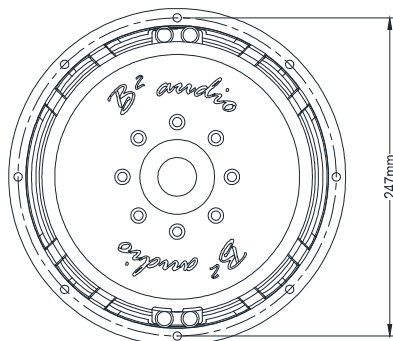


IT CAN NEVER

LOUD

RAMPAGE 1002

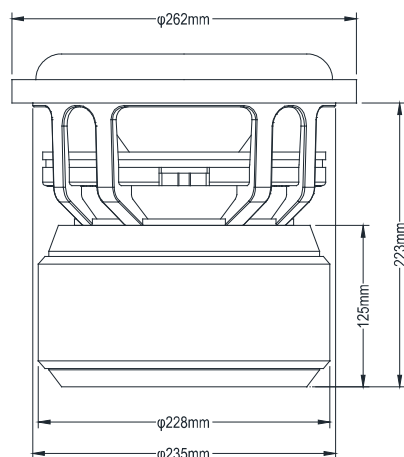

10"
Chassis diameter

84.4 DB
Sensitivity

7.500 W
MAX power

10 HZ-500 HZ
Frequency response

3"/76.2 MM
Aluminum voice coil

ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	10"
MAX Power*	7500 Watts
RMS Power	3000 Watts
Impedance	DVC 2 Ohm
Resonance(natural) Frequency	38.8 Hz
Frequency Response	10 Hz -500 Hz
Sensitivity	81.2 dB (1w/1m)
Voice Coil Diameter	3" / 76.2 mm
Winding Material	8 Layer aluminum
Magnet Type	Ferrite
Motor Assembly weight	880 Oz
Cone Material	Carbonfiber
Surround Type	Tall U Shaped Foam

MOUNTING/SHIPPING INFORMATION

Overall Diameter	10.32 / 262 in/mm
Baffle cutout Diameter	9.25 / 235 in/mm
Mounting Depth	8.78 / 223 in/mm
Total Depth	9.45 / 240 in/mm
Net Weight(1 PC)	27 kgs
Shipping Weight (set)	28.5 kgs
Shipping Box(set)	330 x 330 x 340 mm

THIELE SMALL PARAMETERS

FS	38.8 Hz
Vas	8.5 L
RE (series)	3.8 Ohm
Qms	4.97
Qes	0.65
Qts	0.57
Cms	60 um/N
BL^2/RE	102.5
MMS	267 G
Xmax (one way)	30 mm
SD	315.8 cm ²
Efficiency	0.08 %
Le(1 KHz)	2.89 mH
EBP	60

ENCLOSURE SUGGESTIONS

SEALED	17.2L / 0.61Ft ³
Qtc / F3	0.553 / 60.3 Hz
PORTED COMPACT	28.32 L / 1 Ft ³
Fb / Port Area / Port Length	42 Hz / 15.5 in ² /21.8"
PORTED	40 L / 1.42 Ft ³
Fb / Port Area / Port Length	35 Hz / 15.5in ² /22.3"
BANDPASS 4. ORDER RATIO	3:1

* Peak power handling test. Pink noise butterworth filtered at 12 dB per octave with cutoff frequency of 50 Hz.

* Please note that the frequency response measurements are supplied for comparison only and are not a measure of the low frequency performance which may be achieved in a fully optimised system.